


F5 型管法蘭組

F5 Series Pipe Flange Kits

最高工作壓力 210kgf/cm²

本法蘭安裝尺寸依據：SAE 4 Bolt Solid Flanges

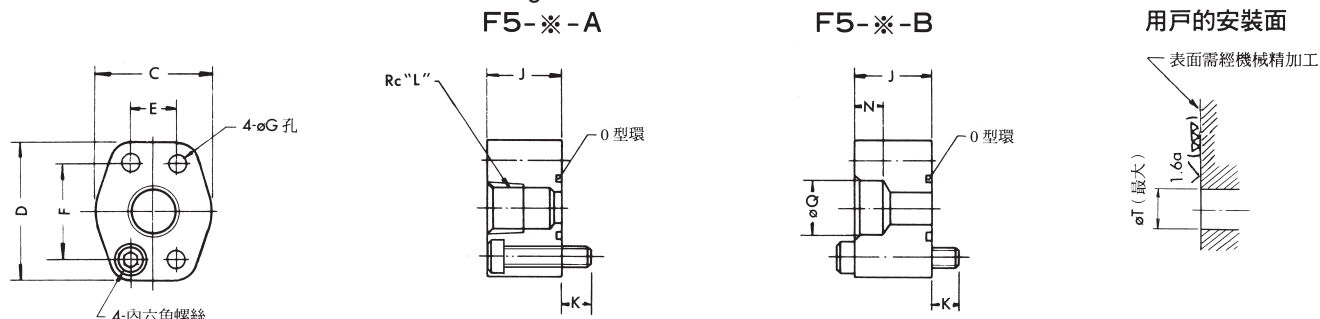

規格

型 號	接管 管徑	尺寸 mm											O型環	內六角螺絲	最高工作壓力 kgf/cm ²	重量 kg
		C	D	E	F	G	J	K	L	N	Q	T				
F5-04W-A	3/8	40	56	17.5	38.1	8.8	26	12	3/8	-	-	16	P22	M 8 X 30	210	0.5
F5-04W-B								9	-	9	17.8			M 8 X 35		
F5-04 -A	1/2							12	1/2	-	-			M8 X 30		
F5-04 -B								9	-	11	22.2			M8 X 35		
F5-06X-A	3/4	54	71	22.2	47.6	8.8	28.5	12	3/4	-	-	20	G30	M 8 X 30	210	0.7
F5-06X-B						-		12	27.7	M 8 X 40						
F5-06 -A						11		3/4	-	-	M10 X 35			210	0.7	
F5-06 -B								-	12	27.7	M10 X 45					
F5-08W-A	3/4	56	76	26.2	52.4	11	28.5	17	3/4	-	-	26	G35	M10 X 35	210	0.9
F5-08W-B									-	12	27.7			M10 X 45		
F5-08 -A	1								1	-	-			M10 X 35		
F5-08 -B									-	14	34.5			M10 X 45		
F5-10 -A	1-1/4	72	84	30.2	58.7	11	28.5	17	1-1/4	-	-	32	G40	M10 X 35	210	1.2
F5-10 -B									-	16	43.2			M10 X 45		
F5-12 -A	1-1/2	74	96	35.7	69.9	13.5	30	17	1-1/2	-	-	38	G50	M12 X 35	210	1.5
F5-12 -B								15	-	18	49.1			M12 X 45		
F5-16W-A	1-1/2	96	107	42.9	77.8	13.5	29.5	15.5	1-1/2	-	-	48	G65	M12 X 30	210	1.8
F5-16W-B									-	18	49.1			M12 X 45		
F5-16 -A	2								-	-	-	M12 X 30	175	1.7		
F5-16 -B									-	20	61.1	M12 X 45				
F5-20W-B	2	100	117	50.8	88.9	13.5	38	17	-	20	61.1	51	G70	M12 X 55	175	2
F5-20 -B	2-1/2								-	20	77.1	62		M12 X 55		
F5-24 -B	3	116	135	61.9	106.4	17.5	38	17	-	20	90.0	76	G85	M16 X 55	35	2.7
F5-28 -B	3-1/2	134	153	69.9	120.7	17.5	38	17	-	28	102.8	88	G100	M16 X 55	35	3.4
F5-32 -B	4	150	162	77.8	130.2	17.5	43	17	-	28	115.5	101	G115	M16 X 60	35	3.7

型號意義

適用流體符號

無記號：標準

F：磷酸脂系油專用

系列號

口徑代號

F - F5 - 06 X - A - 10T

設計代號

接管型式

A：螺紋連接型

B：套焊型

特殊規格

無記號：標準

X：安裝螺絲特殊

W：接管管徑小一級

註)

1. 管法蘭組帶有O型環及內六角螺絲。

2. O型環的材質如下

F5-※-※-10T NBR (丁晴橡膠) HS 90

F-F5-※-※-10T FPM (氟橡膠) HS 90

3. 內六角螺絲的強度區分為12.9T

內六角螺絲擰緊力矩

內六角螺絲	擰緊力矩 kgf • m	
	推薦	容許範圍
M8	3.6	±10%
M10	7.0	
M12	12.0	
M16	28.7	

上述擰緊力矩容許範圍僅適用於排油口之用途。