


Fittings and auxiliary equipment

Safety valve

without lubricant nipple

Order No.	tube diam.
161-210-012	6
161-210-016	10
161-210-018 (Fig.)	8


Opening pressure 300 ± 20 bars  
Material: steel, galvanized surface



with lubricant nipple

Order No.	tube diam.
161-210-014	6
161-210-025	8


Opening pressure 300 ± 20 bars  
Material: steel, galvanized surface



Safety valve with plug-in connector


without lubricant nipple

Order No. 161-210-021  
Opening pressure 300 ± 20 bars  
Material: brass; steel, galvanized surface




with lubricant nipple

Order No. 161-210-020  
Opening pressure 300 ± 20 bars  
Material: brass; steel, galvanized surface



Tube cutter with formation of claw groove for quick connectors,  
order No. 169-000-337

Safety valve with switch

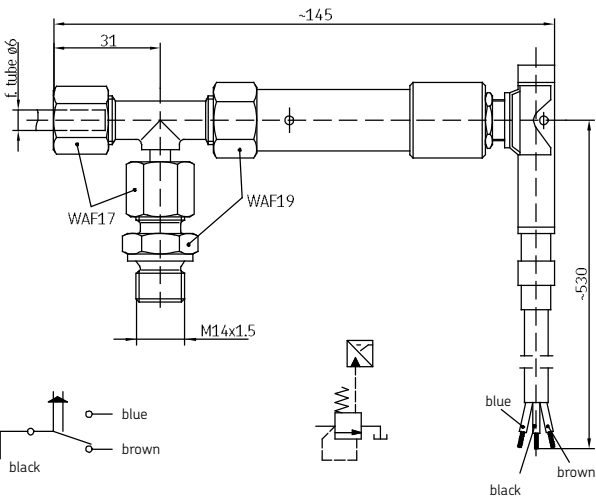

Rated operating voltage ..... 1A (220 V AC)  
Operating temperature range .... -30 to +80 °C

Order No.	Opening pressure (bars)	Material
169-200-130	250 ± 20	steel, galvanized surface

Safety valve

Order No.	Opening pressure (bars)
161-210-008	300 ± 20

Material: steel, galvanized surface

